




# IPA<sup>®</sup> Advanced Analytics

Uncover causality — the next level of pathway analysis

Genomic, proteomic, metabolomic and other life science data are puzzle pieces to complex biological networks and pathways. Leveraging the unique structure and unparalleled content of the QIAGEN Knowledge Base, Ingenuity Pathway Analysis (IPA) reveals significant molecules, biological pathways, and networks underlying complex 'omics data. Now, IPA Advanced Analytics expands the scope, empowering you to discover novel mechanisms of action.

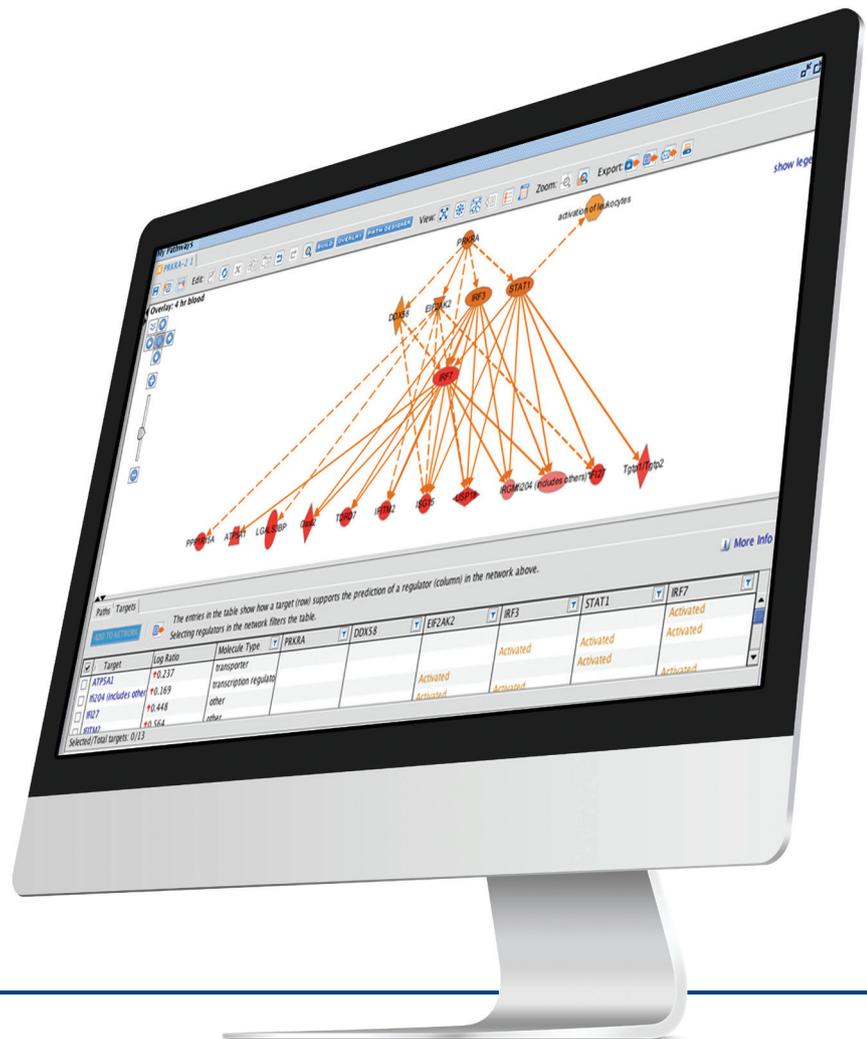

Sample to Insight

## Pathway, network and functional analysis with IPA

IPA is a web-based software application for the analysis, integration, and interpretation of data derived from gene expression experiments including RNA-Seq, microRNA and SNP microarrays, metabolomics, proteomics, and small-scale experiments that generate gene and chemical lists. Downstream Effects Analysis predicts cellular functions, disease processes, and other phenotypes impacted by patterns in an analyzed dataset. Upstream Regulator Analysis identifies regulators (transcription factors, cytokines, kinases, etc.) directly linked to the targets in analyzed data and whose activation or inhibition may account for observed changes.

## IPA Advanced Analytics — get the most out of your data

Going beyond core analyses, the Causal Network Analysis and BioProfiler capabilities of IPA Advanced Analytics identify plausible causes for changes observed in an analyzed dataset.

### The innovative features of IPA Advanced Analytics:


- Generate novel hypotheses for mechanisms of action or drug targets

- Prioritize predicted regulatory networks by connection to disease or phenotype of interest
- Uncover causal relationships relevant to your experimental data

## Generate informed hypotheses about causality

The Causal Network Analysis feature of IPA Advanced Analytics uses powerful algorithms to generate multi-tiered regulatory networks that may explain the gene expression changes exhibited in a dataset. The core Upstream Regulator Analysis of IPA identifies upstream molecules that are directly connected to the targets exhibiting changes in a dataset. So, for example, in a study on gene expression changes in blood of mice exposed to toxic welding fumes, IPA identified activation of transcription factor IRF7 as a causal mechanism for the observed upregulation of targets in the analyzed dataset.

Causal Network Analysis goes the next step. It enables the discovery of novel regulatory mechanisms by expanding upstream analysis to include regulators that are not directly connected to targets in the dataset. Thus, in our previous example, IRF7 may be an intervening molecule of the regulatory activity of protein kinase PRKRA (depicted as the root

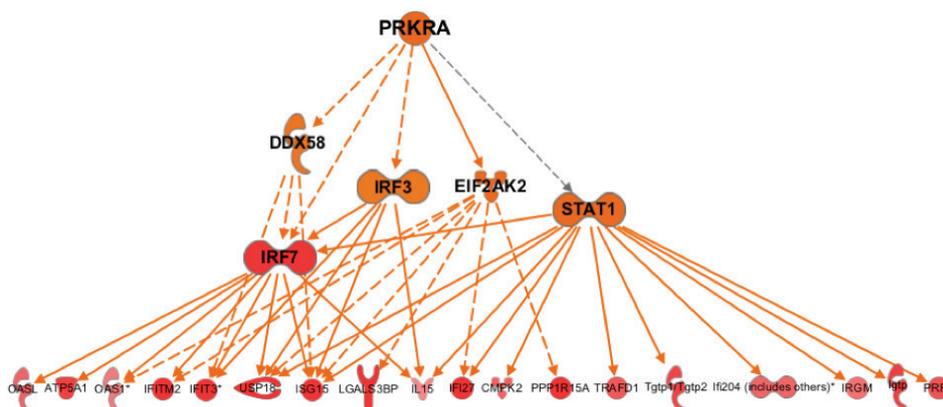

**Figure 1. Causal Network Analysis identifies multi-tiered regulatory networks underlying patterns in data.** Gene expression data from blood of mice exposed to welding fumes were analyzed for upstream regulators. Standard analysis identified the interferon regulatory factor IRF7. Causal Network Analysis expanded the scope to include more regulators and identified the protein kinase PRKRA as a possible regulatory node, which may work through IRF7 to elicit the observed expression changes.

**BioProfiler**

ADORA2A - VTN (p1 of 1) More Info

Molecule	Add column(s)	Disease & Evidence			Add column(s)			
Symbol		Molecule Activity	Effect on D...	Disease	Mutati...	Sp...	Findi..	
ADORA2A	G-protein ...	increased activity	increases	fibrosis of lung	wild type	Uncategoriz...	causal	1
ADORA2B	G-protein ...	increased activity	increases	fibrosis of lung	wild type	Uncategoriz...	causal	1
ARG1	enzyme	increased activity	increases	fibrosis of lung	wild type	Mouse	causal	1
ARG2	enzyme	increased activity	increases	fibrosis of lung	wild type	Mouse	causal	1
CCL24	cytokine	increased activity	increases	fibrosis of bronchial ...	wild type	Mouse	causal	2
HCK	kinase	unknown change in acti...	increases	fibrosis of lung	homozygous,mi...	Mouse	causal	1
IL10	cytokine	increased activity	increases	fibrosis of lung	wild type	Mouse	causal	3
IL12B	cytokine	increased activity	increases	fibrosis of lung	wild type	Mouse	causal	2
IL13	cytokine	increased activity	increases	fibrosis of lung	wild type	Mouse	causal	11
IL1B	cytokine	increased activity	increases	fibrosis of lung	wild type	Mouse	causal	2
▶IL5	cytokine	increased activity	increases	fibrosis of bronchial ...	wild type	Mouse	causal	3
MUC5AC/MUC...	peptidase	unknown change in acti...	increases	fibrosis of lung; idiop ...	unclassified mut...	Human	causal	1
PLA2G10	enzyme	increased activity	increases	fibrosis of lung; idiop ...	wild type	Mouse	causal	1
PTPN11	phosphata...	increased activity	increases	fibrosis of lung	wild type	Uncategoriz...	causal	1
SERPINE1	other	increased activity	increases	fibrosis of lung	wild type	Mouse	causal	3
SFTPA1	transporter	unknown change in acti...	increases	fibrosis of lung; idiop ...	unclassified mut...	Human	causal	1
SFTPA2	other	unknown change in acti...	increases	fibrosis of lung; idiop ...	unclassified mut...	Human	causal	2
TERC	other	unknown change in acti...	increases	fibrosis of lung; telo ...	unclassified mut...	Human	causal	8
TERT	enzyme	unknown change in acti...	increases	fibrosis of lung; telo ...	unclassified mut...	Human	causal	15
▶TGFB1	growth fac...	increased activity,unkn...	increases	fibrosis of lung; ...	unclassified mut...	Rat,Mouse	causal	9
TOP1	enzyme	increased activity	increases	fibrosis of lung	wild type	Uncategoriz...	causal	1

Selected/Total molecules : 0 / 23

**Figure 2. Comprehensive profiles of phenotypes in BioProfiler.** Capitalizing on the highly interconnected content of the QIAGEN Knowledge Base, BioProfiler delivers detailed listings of genes and compounds implicated in diseases and other phenotypes, which the user can filter and sort to hone in on interesting causal mechanisms.

of the causal network in Figure 1). The user can quickly visualize the regulatory networks most closely associated with a particular disease or phenotype and then prioritize the most interesting and relevant causal networks as hypotheses to explain patterns in the dataset. Furthermore, by prioritizing resulting networks by molecule, disease, function or phenotype, the user can discover more distant connections between the causal network and the research or therapeutic area of interest.

## Identify causally relevant molecules and genes


The QIAGEN Knowledge Base contains over 5 million facts extracted from scientific publications and databases and structured so that each relationship between molecule, diseases, and phenotype is characterized and searchable. BioProfiler probes this repository of scientific information to generate molecular profiles of diseases, phenotypes, and biological processes (e.g., apoptosis) listing all the genes and compounds that have been associated with the profiled term. The power of this tool lies in the intuitive and

comprehensive layout of the results (Figure 2) enabling the user to find, filter, and prioritize genes and compounds based on the research question at hand. The user can focus on molecules of interest, find causally relevant genes, filter for specific genetic evidence or for species, and explore associations with similar diseases or phenotypes. The surfaced data can then be examined further in the context of pathways using all available IPA features.

## Relationship Export

The Relationship Export capability in IPA enables you to export relationships from networks and pathways for further visualization.

You can export the structural information contained within IPA networks or pathways for visualization in other tools such as Cytoscape. The export format contains relationships modeled as triples: Node A -> Relationship -> Node B (Figure 3).

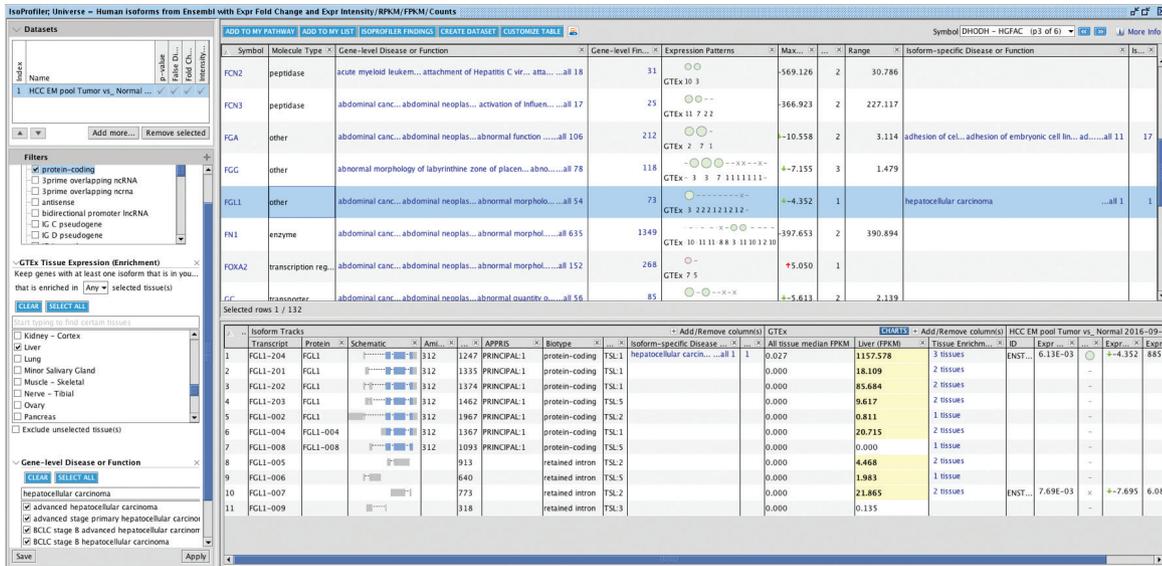

## RNA-seq Support with Isoform View and IsoProfilr

**IsoProfilr** helps you determine which isoforms from your RNA-seq datasets have interesting biological properties relevant to your research project. For example, genes where isoforms are both upregulated and down regulated in the same dataset, which may have important functional consequences. Find cases of isoform switching – when the most highly expressed (highest RPKM) isoform for a gene differs between the experiment and the control samples, or explore all the cases where a gene expresses multiple protein-coding isoforms or are known to impact a disease or function.

## Maximize insights into your data

With supporting evidence from published data and powerful analytics, IPA Advanced Analytics enables you to generate testable hypotheses and validation experiments for the causal connections embedded in your data. IPA Advanced Analytics takes you beyond standard analyses so you can focus on novel insights about the causes of disease or other phenotypes of interest.

Get the most out of your biological analysis.

Visit [qiagenbioinformatics.com/products/ingenuity-pathway-analysis/](http://qiagenbioinformatics.com/products/ingenuity-pathway-analysis/)

1106507 3/2017 © 2017 QIAGEN, all rights reserved.

IPA Advanced Analytics is intended for molecular biology applications. This product is not intended for the diagnosis, prevention, or treatment of a disease. For up-to-date licensing information and product-specific disclaimers, see the respective Ingenuity product site. Further information can be requested from [support@ingenuity.com](mailto:support@ingenuity.com) or by contacting your local account manager.

### QIAGEN Bioinformatics

EMEA  
Silkeborgvej 2 · Prismet  
8000 Aarhus C  
Denmark  
Phone: +45 7022 5509

Americas  
1001 Marshall Street, Suite 200  
Redwood City · CA 94063  
USA  
Phone: +1 650 381 5111 or Toll Free: +1 866 464 3684